


# INW PS98i

## 4-20mA SUBMERSIBLE PRESSURE TRANSMITTER

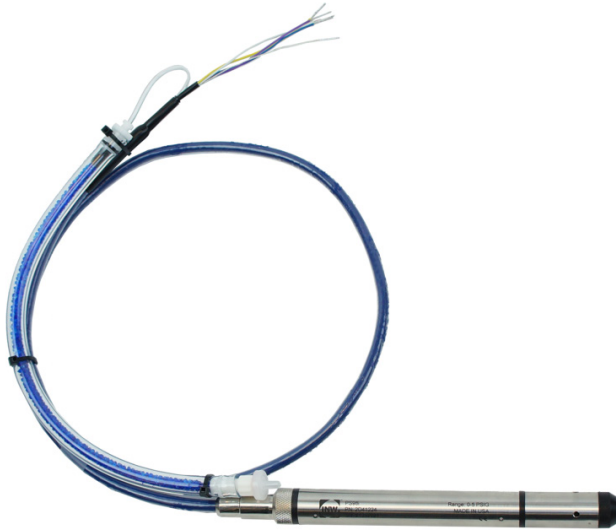

### APPLICATIONS

- Pump and slug tests
- River, stream, reservoir gauging
- Stormwater runoff monitoring
- Wetland Monitoring
- Well, tank, tidal levels
- Flow monitoring
- Water resource management
- Landfill leachate levels
- Control applications

### Features

- Pressure
- $\pm 0.25\%$  FSO accuracy
- Lower power (9-30Vdc)
- Small diameter—0.75" (1.9cm)
- 1/4" NPT end cone adapter option (300psi max.)

The PS98i pressure transmitters are rugged and accurate with great noise immunity, transient protection, and thermal performance.


These pressure sensors have been designed to provide trouble-free submersible operation in liquid environments. Pressure is measured with an extremely rugged and stable piezo-electric, media isolated pressure element and calibrated with well established calibration procedures and NIST traceable equipment.

The PS98i sensors are thermally compensated, making them great where water temperatures vary, as they are thermally stable (2% over 50 degrees standard).

These industry standard, 2-wire, 4-20mA devices offer reverse polarity protection, under- and over-current limitation, and built-in transient protection.

### Contact Your Supplier

## Dimensions

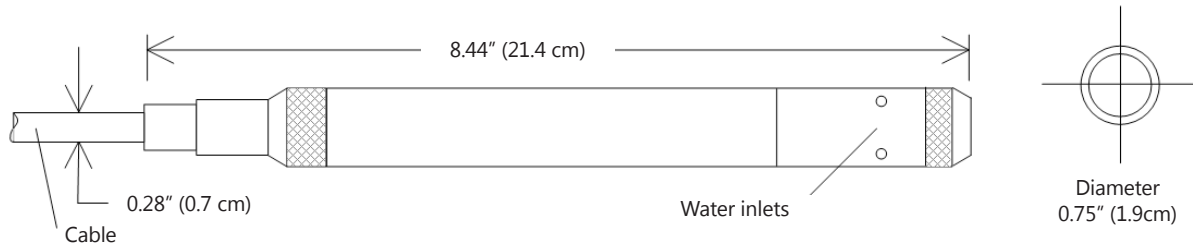

## Specifications

<b>Housing</b>	<b>Weight</b>	0.8 lb. (0.4 kg)
	<b>Length</b>	8.44" (21.4 cm)
	<b>Diameter</b>	0.75" (1.9 cm)
	<b>Body Material</b>	Acetal and 316 stainless or optional titanium
	<b>Wire Seal Material</b>	Fluoropolymer and PTFE
<b>Cable</b>	<b>Cable</b>	Submersible: Polyurethane, polyethylene, or ETFE available
	<b>Desiccant</b>	1-3 mm indicating silica gel
	<b>Field Connector</b>	Available as an option
<b>Operating Temperature Range</b>		Recommended: -5° to 70°C (23° to 158°F) Requires freeze protection if using in water below freezing.
<b>Transmitter Voltage</b>		9-24Vdc (100ms warmup)
<b>Output</b>		4-20mA
<b>Pressure</b>	<b>Element</b>	Silicon strain gauge transducer, 316 stainless or Hastelloy
	<b>Accuracy</b>	±0.25% FSO (static, B.F.S.L. 20°C)
	<b>Range</b>	Gauge PSI: 1, 5, 15, 30, 50, 100, 300 FtH <sub>2</sub> O: 2.3, 12, 35, 69, 115, 231, 692 mH <sub>2</sub> O: 0.7, 3.5, 10.5, 21, 35, 70, 210  Absolute <sup>2</sup> PSI: 30, 50, 100, 300 FtH <sub>2</sub> O: 35, 81, 196, 658 mH <sub>2</sub> O: 10, 24, 59, 200
	<b>Compensated</b>	0° to 50°C (32° to 122°F)
<b>Max operating pressure</b>		1.1 x FS
<b>Burst pressure</b>		3.0 x FS (for >300 psi (650ft, 200m) contact INW representative)
<b>Regulatory</b>		CE

\*Specifications subject to change. Please consult our web site for the most current data (inwusa.com).

1 Higher pressure ranges available upon request

2 Depth range for absolute sensors has 14.7 PSI subtracted to give actual depth allowed.